






# POLY PEARL Side filters

- Made in Europe
- Smooth inner surfaces to inhibit the growth of bacteria
- Air vent
- Transparent lid to allow inspection
- Injected polypropylene filter
- 5 Side filters, Ø 450 mm to 950 mm for flow rates from 6 to 35 m³/h
- Maximum operating pressure: 2 bars
- Filtre/ valve connection kit multiport valve included



#### Filter dimensions

Code	Description	Height of the filter medium	Sand	Filter weight	Max. flowrate	Packaging dimensions
			kg 25 X N°	kg		AXBXC (mm)
125506001	BWT Poly Pearl filter S450 - 1"1/2	300	3	9	6	477X477X580
125506002	BWT Poly Pearl filter S530 - 1"1/2	400	4	12	10	545X545X730
125506003	BWT Poly Pearl filter S620 - 1"1/2	400	6	14	14	635X635X750
125506004	BWT Poly Pearl filter S790 - 2"	450	10	27	22	800X800X965
125506005	BWT Poly Pearl filter S950 - 2"	520	18	37	35	980X980X970

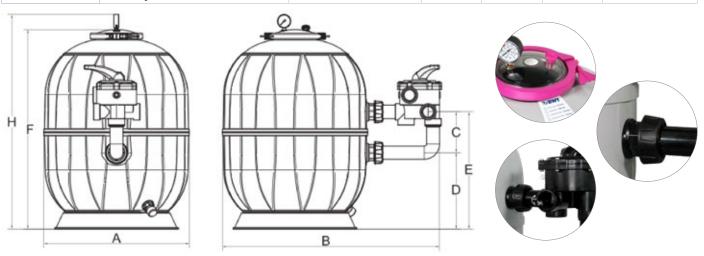

Filter diameter	Dimensions						
Ø A mm	B mm	C mm	D mm	E mm	F mm	H mm	Vanne
Ø 450	716	150	206	356	585	645	1''1/2
Ø 530	730	150	281	431	735	795	1''1/2
Ø 620	820	150	299	449	770	830	1''1/2
Ø 790	1102	200	360	560	955	1010	2''
Ø 950	1270	200	370	570	970	1025	2''

## Top filters

#### TECHNICAL DATA

- Made in Europe
- Smooth inner surfaces to inhibit the growth of bacteria
- Injected polypropylene filter
- 3 Top filters Ø 450 mm to 620 mm for flow rates from 6 to 14 m³/h
- Maximum operating pressure: 2 bars
- Multi-port valve included



### **FIlter dimensions**

Code	Description	Height of the filter medium	Sand	Filter weight	Max. flowrate	Packaging dimensions
			kg 25 X N°	kg		AXBXC (mm)
125506006	BWT Poly Pearl filter T450 - 1"1/2	300	3	9	6	477X477X580
125506007	BWT Poly Pearl filter T530 - 1"1/2	400	4	12	10	545X545X730
125506008	BWT Poly Pearl filter T620 - 1"1/2	400	6	14	14	635X635X750

Ø 450

Ø 530


Ø 620

756

792

926

962

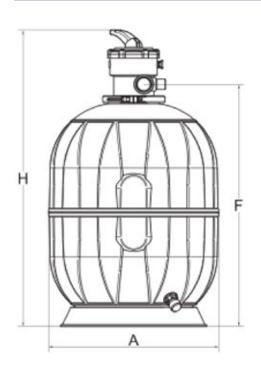



1''1/2

1''1/2





Dealer's stamp:

